



## **RAPIDMAX<sup>®</sup> iso-30**

**MAX**imum Performance, **MAX**imum Durability, **MAX**imum Efficiency

The Australian designed and manufactured **RAPIDMAX<sup>®</sup> iso** high speed door is a tough workhorse designed for FREEZER Applications, fitted with a complete door frame heating system and excellent perimeter sealing to reduce energy consumption and improve environmental control.

**AUSTRALIAN MADE**  
**AUSTRALIAN DESIGNED**  
**GERMAN DRIVE TECHNOLOGY**






Compact Guide Design



MAX Doors ISO-FLEX™ door curtain 240v Single Phase GfA SafeDrive®

Technical Datasheet – <b>RAPIDMAX® iso-30</b>		
Application	Internal / External	
Dimension	Max width	3000mm
	Max height	5000mm
Opening Speed	Up to	2.5m/sec
Top Roll Tube	Galvanised Steel	Standard
Door Curtain	ISO-FLEX® Insulated Curtain 30mm thick double layered fabric	Standard
Door Frame	Powdercoated	Standard
Fascia	Powdercoated	Standard
Windlok System		Standard
Drive System	GfA Safedrive® IP54 - 240V Single Phase	Standard
Control System	GFA TS971 Logic Control IP54	Standard
	GFA TS971-XL Logic Control IP65	Optional
Crash System	Knockout with Manual Reset	Standard
Safety	Light Curtain (1800mm active height)	Standard
	Safedrive® integrated safety brake	Standard
	Emergency Stop Button	Standard
	Manual Chain Over-ride	Standard
	Manual Crank Handle Over-ride	Optional
Wind Load Rating	Gusts > 30klm/hr	Standard
	Gusts > 72klm/hr, Class 1 (max door size 12m²)	Optional

**RAPIDMAX® Clearances**

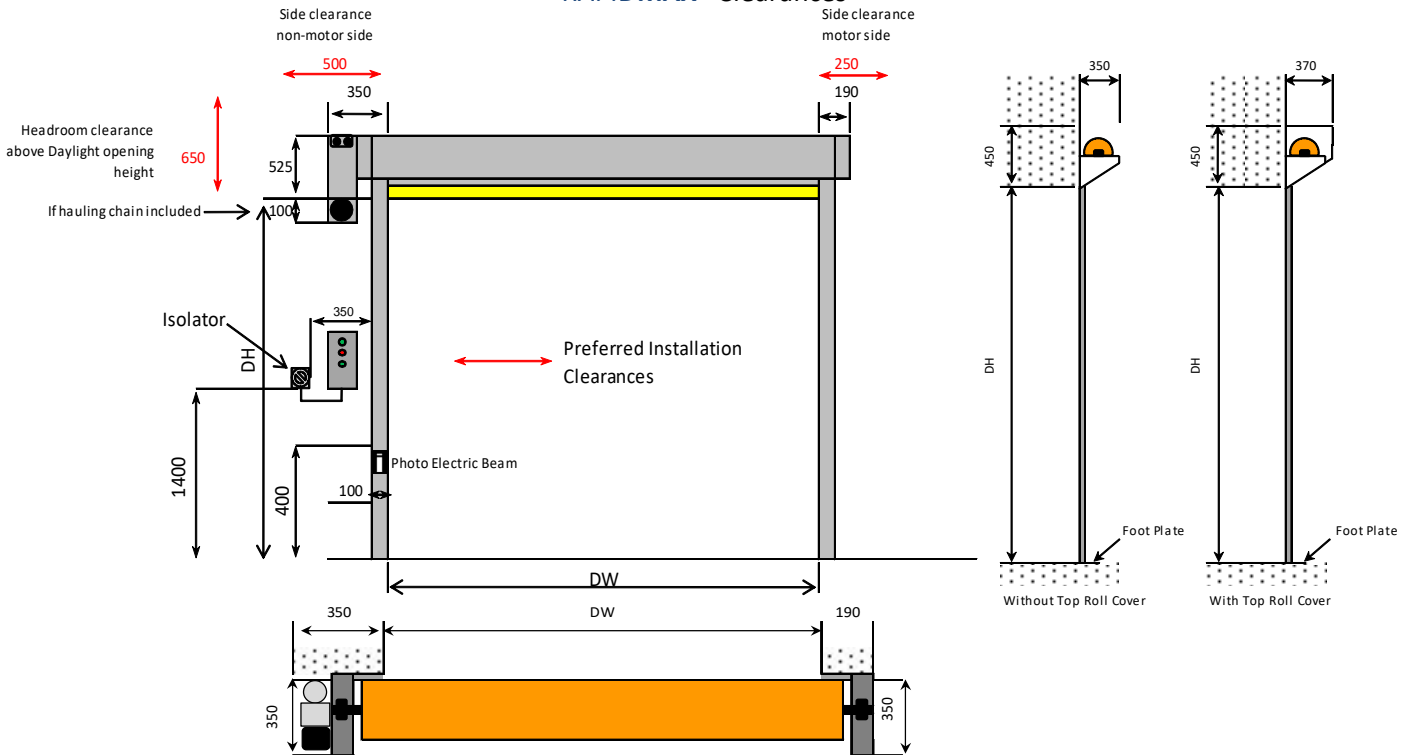

**MAX Door Solutions Pty. Ltd.**  
 P: 1300 793 378  
[sales@maxdoors.com.au](mailto:sales@maxdoors.com.au)  
 56 Export Dr, Molendinar, QLD 4214  
 PO Box 777, Biggera Waters, QLD, 4216  
[www.maxdoors.com.au](http://www.maxdoors.com.au)

