



RAPIDMAX® SS

MAXimum Performance, **MAX**imum Durability, **MAX**imum Efficiency

The Australian designed and manufactured **RAPIDMAX® SS** high speed door is a tough workhorse providing stainless steel frame construction coupled with high speed – whisper quiet operation and efficient perimeter sealing to reduce energy consumption and improve environmental control.

AUSTRALIAN MADE
AUSTRALIAN DESIGNED
GERMAN DRIVE TECHNOLOGY



MAX Doors FoodSafe **TOUGHFLEX**[®] door curtain



Compact Guide Design



240v Single Phase GfA Safedrive




Durable stainless steel construction

Technical Datasheet – **RAPIDMAX**[®] SS

Application	Internal	
Dimension	Max width	3000mm
	Max height	4500mm
Opening Speed	Up to	3.2m/sec
Door Curtain	TOUGHFLEX [®] with No Vision Panel	Optional
	TOUGHFLEX [®] with Full Vision Panel	Standard
Door Frame	Stainless Steel - 304 grade	Standard
	Stainless Steel – 316 grade	Optional
Top Roll Tube	Galvanised Steel	Standard
	Stainless Steel – 316 grade	Optional
Windlok System		Standard
Drive System	GfA Safedrive [®] IP65 – 240V Single Phase	Standard
Control System	GfA TS971 Logic Control IP54	Standard
	GfA TS971-XL Logic Control IP65	Optional
Crash System	Knockout with manual reset	Standard
Safety	Bottom Beam Safety Edge	Standard
	>Optical	Standard
	Light Curtain (active height 1800mm)	Optional
	Safedrive [®] integrated safety brake	Standard
	Door-line PE Beam	Standard
	Emergency Stop Button	Standard
Manual Chain Over-ride		Standard
	Manual Crank Handle Over-ride	Optional
Wind Load Rating	Gusts > 30km/hr	Standard
	Gusts > 72km/hr, Class 1 (max door size 12m²)	Optional
Options	Stainless Bearings & Drive Shaft	Optional

RAPIDMAX[®] Clearances

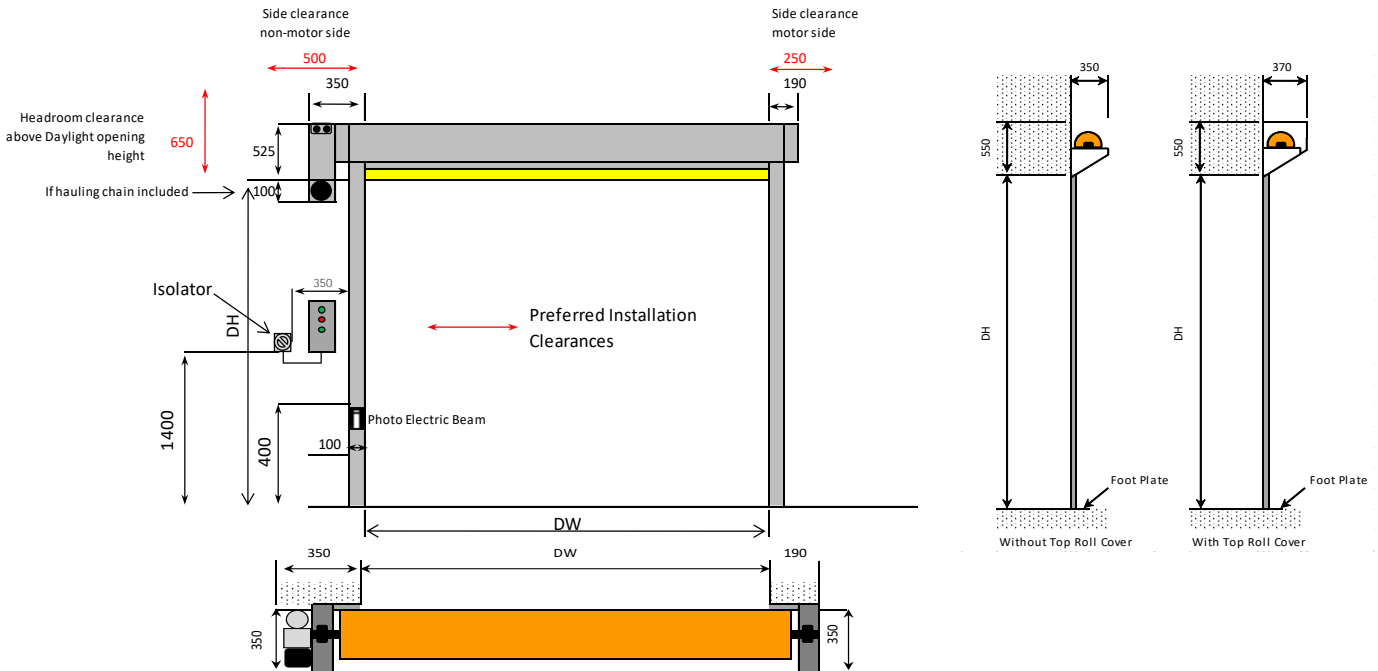

MAX Door Solutions Pty. Ltd.

P: 1300 793 378

sales@maxdoors.com.au

56 Export Drive, Molendinar, QLD 4214
PO Box 777, Biggera Waters, QLD, 4216

www.maxdoors.com.au